


# THE JAMES WALKER CO.

## WALKER #228D 2-LEG STRAND LAID SLINGS

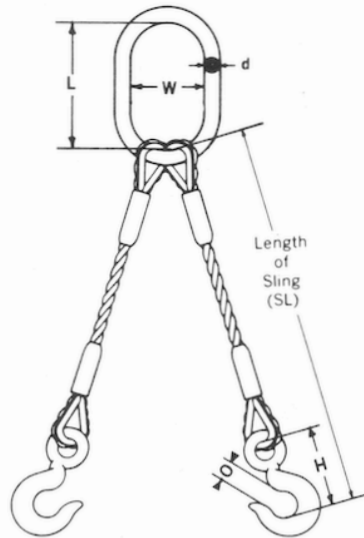

### TWO LEG BRIDLE SLINGS #228D: SINGLE ROPE LEGS, OBLONG LINK, EYE HOIST HOOKS, AND TORPEDO LOOP-LOCKS

Rated Capacity in Tons - EIPS IWRC										
Diam. of Rope (Inches)	Min. Length (SL) of Sling ft-in	Rated Capacity When Used			Alloy Oblong Links			Hooks		
		60° from horizontal	45° from horizontal	30° from horizontal	d (Inches)	W (Inches)	L (Inches)	Rated Capacities (Tons)	O (Inches)	H (Inches)
1/4	1' 3"	1.1	.91	.65	1/2	2.8	5.0	3/4	.90	3.34
3/8	1' 8"	2.5	2.0	1.4	1/2	2.8	5.0	1-1/2	1.00	4.14
1/2	2' 0"	4.4	3.6	2.5	3/4	3.2	6.0	3	1.47	5.77
5/8	2' 4"	6.8	5.5	3.9	1	4.3	7.5	4	1.78	6.19
3/4	2' 9"	9.7	7.9	5.6	1-1/4	5.5	9.5	5	1.75	7.37
7/8	3' 3"	13.0	11.0	7.6	1-1/4	5.5	9.5	7-1/2	2.29	9.07
1	3' 6"	17.0	14.0	9.8	1-1/2	5.9	10.5	10	2.50	10.08
1-1/8	4' 0"	21.0	17.0	12.0	1-1/2	5.9	10.5	15	3.30	12.53
1-1/4	4' 6"	26.0	21.0	15.0	1-3/4	6.0	12.0	15	3.30	12.53
1-3/8	5' 0"	31.0	25.0	18.0	2	7.0	14.0	25	4.25	18.19
1-1/2	5' 6"	37.0	30.0	21.0	2	7.0	14.0	25	4.25	18.19
1-3/4	6' 6"	49.0	40.0	28.0	2-1/2	8.0	16.0	25	4.25	18.19
2	8' 0"	63.0	52.0	37.0	3	9.0	18.0	40	5.75	20.12
2-1/4	8' 9"	77.0	63.0	44.0	3-1/4	10.0	20.0	40	5.75	20.12

\*MINIMUM LENGTH BASED ON THIMBLED EYES AND EYE HOOK.


\*LATCHES FOR HOOKS AVAILABLE

\*OTHER FITTINGS AVAILABLE

**WARNING: DO NOT EXCEED RATED CAPACITIES**

# THE JAMES WALKER CO.

## WALKER #303F 3-LEG STRAND LAID SLINGS

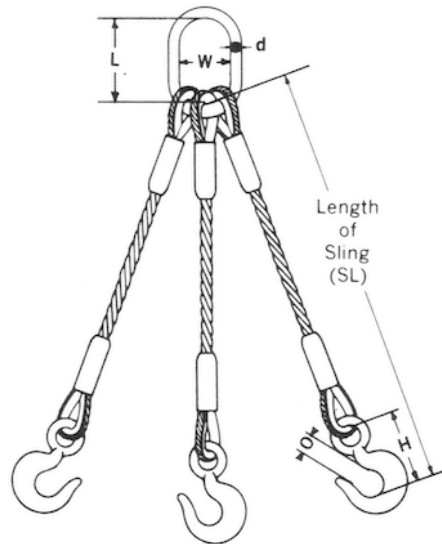

### THREE LEG BRIDLE SLINGS #303F: SINGLE ROPE LEGS, OBLONG LINK, EYE HOIST HOOKS, AND TORPEDO LOOP-LOCKS

Rated Capacity in Tons - EIPS IWRC										
Diam. of Rope (Inches)	Min. Length (SL) of Sling ft-in	Rated Capacity When Used			Alloy Oblong Links			Hooks		
		60° from horizontal	45° from horizontal	30° from horizontal	d (Inches)	W (Inches)	L (Inches)	Rated Capacities (Tons)	O (Inches)	H (Inches)
1/4	1' 3"	1.7	1.4	.97	1/2	2.8	5.0	3/4	.90	3.34
3/8	1' 8"	3.7	3.0	2.2	1/2	2.8	5.0	1-1/2	1.00	4.14
1/2	2' 0"	6.6	5.4	3.8	3/4	3.2	6.0	3	1.47	5.77
5/8	2' 4"	10.0	8.3	5.9	1	4.3	7.5	4	1.78	6.19
3/4	2' 9"	15.0	12.0	8.4	1-1/4	5.5	9.5	5	1.75	7.37
7/8	3' 3"	20.0	16.0	11.0	1-1/2	5.9	10.5	7-1/2	2.29	9.07
1	3' 6"	26.0	21.0	15.0	1-3/4	6.0	12.0	10	2.50	10.08
1-1/8	4' 0"	31.0	26.0	18.0	1-3/4	6.0	12.0	15	3.30	12.53
1-1/4	4' 6"	38.0	31.0	22.0	2	7.0	14.0	15	3.30	12.53
1-3/8	5' 0"	46.0	38.0	27.0	2-3/4	9.5	16.0	25	4.25	18.19
1-1/2	5' 6"	55.0	45.0	32.0	2-3/4	9.5	16.0	25	4.25	18.19
1-3/4	6' 6"	74.0	60.0	42.0	3-1/4	10.0	20.0	25	4.25	18.19
2	8' 0"	95.0	78.0	55.0	4	10.0	20.0	40	5.75	20.12
2-1/4	8' 9"	116.0	94.0	67.0	4	10.0	20.0	40	5.75	20.12

\*MINIMUM LENGTH BASED ON THIMBLED EYES AND EYE HOOK.


\*LATCHES FOR HOOKS AVAILABLE

\*OTHER FITTINGS AVAILABLE

**WARNING: DO NOT EXCEED RATED CAPACITIES**

# THE JAMES WALKER CO.

## WALKER #404D 4-LEG STRAND LAID SLINGS

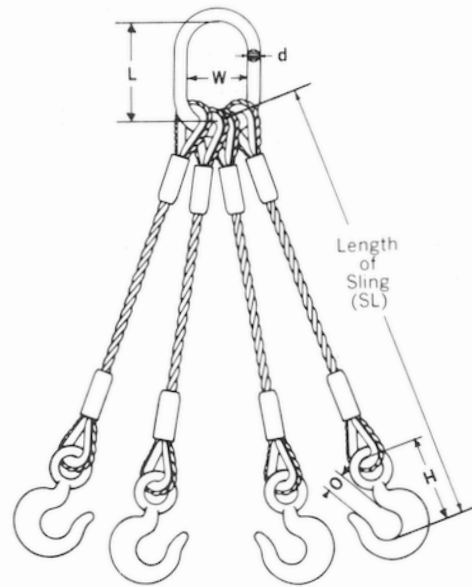

### FOUR LEG BRIDLE SLINGS

**#404D: SINGLE ROPE LEGS, OBLONG LINK, EYE HOIST HOOKS, AND TORPEDO LOOP-LOCKS**

Rated Capacity in Tons - EIPS IWRC										
Diam. of Rope (Inches)	Min. Length (SL) of Sling ft-in	Rated Capacity When Used			Alloy Oblong Links			Hooks		
		60° from horizontal	45° from horizontal	30° from horizontal	d (Inches)	W (Inches)	L (Inches)	Rated Capacities (Tons)	O (Inches)	H (Inches)
1/4	1' 3"	2.2	1.8	1.3	1/2	2.8	5.0	3/4	.90	3.34
3/8	1' 8"	5.0	4.1	2.9	1/2	2.8	5.0	1-1/2	1.00	4.14
1/2	2' 0"	8.8	7.1	5.1	3/4	3.2	6.0	3	1.47	5.77
5/8	2' 4"	14.0	11.0	7.8	1	4.3	7.5	4	1.78	6.19
3/4	2' 9"	19.0	16.0	11.0	1-1/4	5.5	9.5	5	1.75	7.37
7/8	3' 3"	26.0	21.0	15.0	1-1/2	5.9	10.5	7-1/2	2.29	9.07
1	3' 6"	34.0	28.0	20.0	1-3/4	6.0	12.0	10	2.50	10.08
1-1/8	4' 0"	42.0	34.0	24.0	1-3/4	6.0	12.0	15	3.30	12.53
1-1/4	4' 6"	51.0	42.0	30.0	2	7.0	14.0	15	3.30	12.53
1-3/8	5' 0"	62.0	50.0	36.0	2-3/4	9.5	16.0	25	4.25	18.19
1-1/2	5' 6"	73.0	60.0	42.0	2-3/4	9.5	16.0	25	4.25	18.19
1-3/4	6' 6"	98.0	80.0	57.0	3-1/4	10.0	20.0	25	4.25	18.19
2	8' 0"	127.0	104.0	73.0	4	10.0	20.0	40	5.75	20.12
2-1/4	8' 9"	154.0	126.0	89.0	4	10.0	20.0	40	5.75	20.12

**\*MINIMUM LENGTH BASED ON THIMBLED EYES AND EYE HOOK.**

**\*LATCHES FOR HOOKS AVAILABLE**

**\*OTHER FITTINGS AVAILABLE**

**WARNING: DO NOT EXCEED RATED CAPACITIES**