


THE JAMES WALKER CO.

WALKER BRAIDED SLINGS 6-PART FLAT BODY

No. 167-B
(with served loops)

No. 168-B
(with arc thimbles)

No. 169-B
(with slip-thru thimbles)

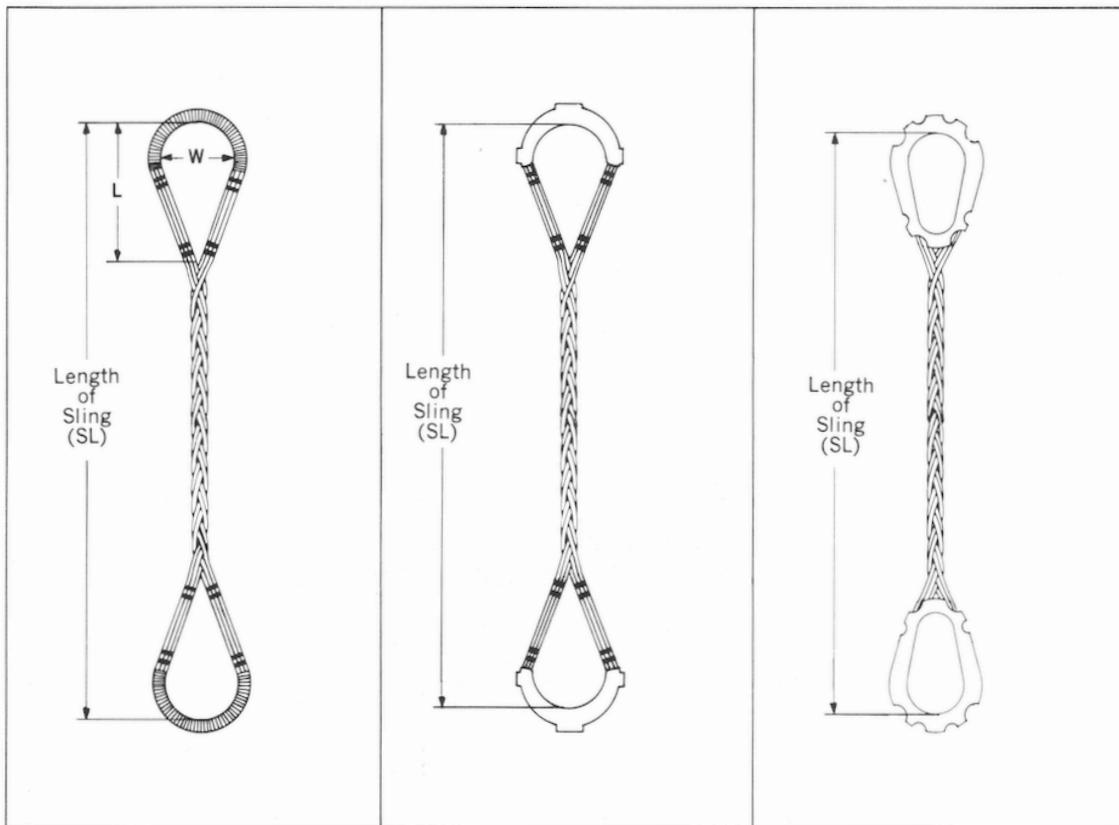

Diam. of Individual Ropes (Inches)	Min. Length (SL) of Slings ft-in	Lengths of Loops		Rated Capacity in Tons (2000 lb)			Slip-Thru Thimble Size No.	Arc Thimble Size No.
		Suggested L (in)	Min. L (in)	E.I.P.S. Wire Rope - IWRC				
				Choker Hitch	Single Leg Vertical	Vertical Basket		
3/16	2' 0"	8	6	1.4	1.6	3.2	W-3	8C
1/4	2' 6"	12	8	2.5	2.9	5.7	W-4	9C
5/16	3' 0"	12	8	3.9	4.4	8.9	W-4	10C
3/8	3' 6"	16	10	5.5	6.3	13	W-5	14C
7/16	4' 0"	18	12	7.5	8.6	17	W-5	16C
1/2	4' 6"	18	12	9.8	11	22	W-5	18C
9/16	5' 0"	20	14	12	14	28	W-6	20C
5/8	5' 6"	24	18	15	17	35	W-7	22C
3/4	6' 0"	28	20	22	25	49	W-7	24C
7/8	7' 0"	32	24	29	33	67	W-8	32C
1	8' 0"	36	30	38	43	87	W-9	40C

BASKET RATINGS ARE BASED ON A MINIMUM D/d OF 25 (USING COMPONENT ROPE).

WARNING: DO NOT EXCEED RATED CAPACITIES