


THE JAMES WALKER CO.

WALKER BRAIDED SLINGS 8-PART ROUND BODY ERECTOR SLINGS

No. 127-A
(with served loops)

No. 129-A
(with slip-thru thimbles)

No. 130-A
(with arc thimbles)

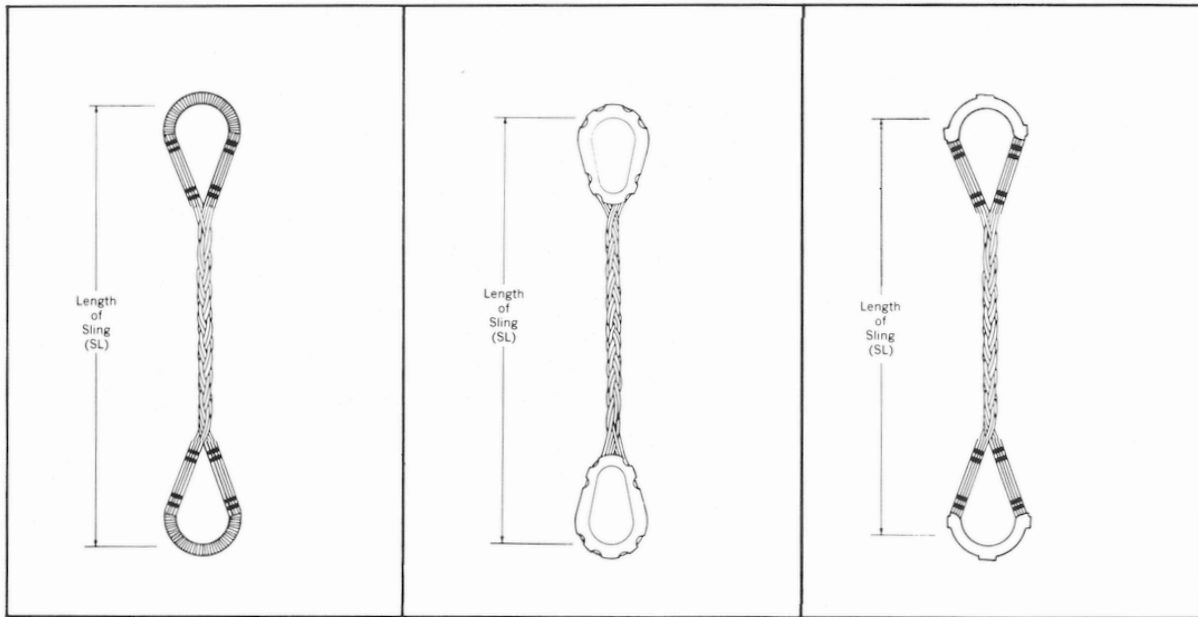

Diam. of Individual Ropes (Inches)	Min. Length (SL) of Sling ft-in	Lengths of Loops Suggested L (in)	Rated Capacity in Tons (2000 lb)			Slip-Thru Thimble Size No.	Arc Thimble Size No.
			E.I.P.S. Wire Rope - IWRC				
			Choker Hitch	Single Leg Vertical	Vertical Basket		
3/16	2' 0"	10	1.9	2.2	4.3	W-3	9C
1/4	2' 6"	12	3.3	3.8	7.6	W-4	10C
5/16	2' 9"	16	5.2	5.9	12	W-5	14C
3/8	3' 6"	16	7.4	8.5	17	W-5	16C
7/16	4' 0"	18	10	11	23	W-6	18C
1/2	4' 6"	18	13	15	30	W-7	20C
9/16	5' 6"	24	16	19	38	W-7	22C
5/8	6' 6"	28	20	23	46	W-8	24C
3/4	7' 6"	30	29	33	66	W-9	28C
7/8	8' 9"	36	39	45	89	W-10	32C
1	10' 6"	48	51	58	116	W-10	40C
1-1/8	12' 6"	60	64	73	146	W-11	48C
1-1/4	15' 0"	72	78	89	179	W-11	N/A
1-3/8	18' 8"	84	94	108	215	N/A	N/A

BASKET RATINGS ARE BASED ON A MINIMUM D/d OF 25 (USING COMPONENT ROPE).

WARNING: DO NOT EXCEED RATED CAPACITIES