


# THE JAMES WALKER CO.

## WALKER GROMMETS & ENDLESS SLINGS

### #11-B REGULAR GROMMET SLINGS STRAND-LAID CONSTRUCTION




When giving length of sling, be sure to specify circumferential length (SL)



Rope Diameter (Inches)	Rated Capacities In Tons			Minimum Sling Length
	Vertical	Choker	Vertical Basket	
3/8"	2.1	1.5	4.2	3'0"
7/16"	2.8	2.0	5.7	3'6"
1/2"	3.7	2.6	7.3	4'0"
9/16"	4.6	3.2	9.3	4'6"
5/8"	5.7	4.0	11	5'0"
3/4"	8.2	5.7	16	6'0"
7/8"	11	7.7	22	7'0"
1"	14	10	29	8'0"

### #12-B ENDLESS SLING WITH DOUBLE-SLEEVE LOCK

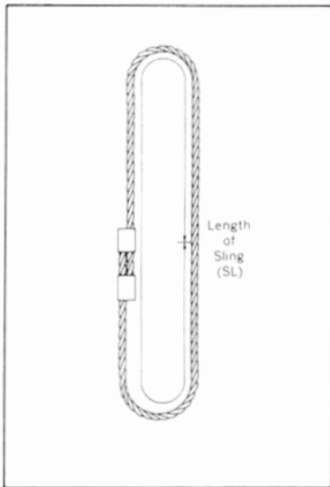

Rope Diameter (Inches)	Rated Capacities In Tons			Minimum Sling Length	Splice Length A (In.)
	Vertical	Choker	Vertical Basket		
1/4"	1.0	.71	2.0	2'0"	10
5/16"	1.6	1.1	3.1	2'6"	10
3/8"	2.3	1.6	4.5	3'0"	10
7/16"	3.1	2.1	6.1	3'6"	10
1/2"	3.9	2.8	7.9	4'0"	12
9/16"	5.0	3.5	10	4'6"	12
5/8"	6.1	4.3	12	5'0"	12
3/4"	8.8	6.2	18	6'0"	18
7/8"	12	8.3	24	7'0"	18
1"	15	11	31	8'0"	20

BASKET RATINGS ARE BASED ON A MINIMUM D/d OF 5.

**WARNING: DO NOT EXCEED RATED CAPACITIES**