


THE JAMES WALKER CO.

WALKER BOOM PENDANTS SWAGED FITTINGS

Open swaged sockets Open and closed swaged sockets Closed swaged sockets

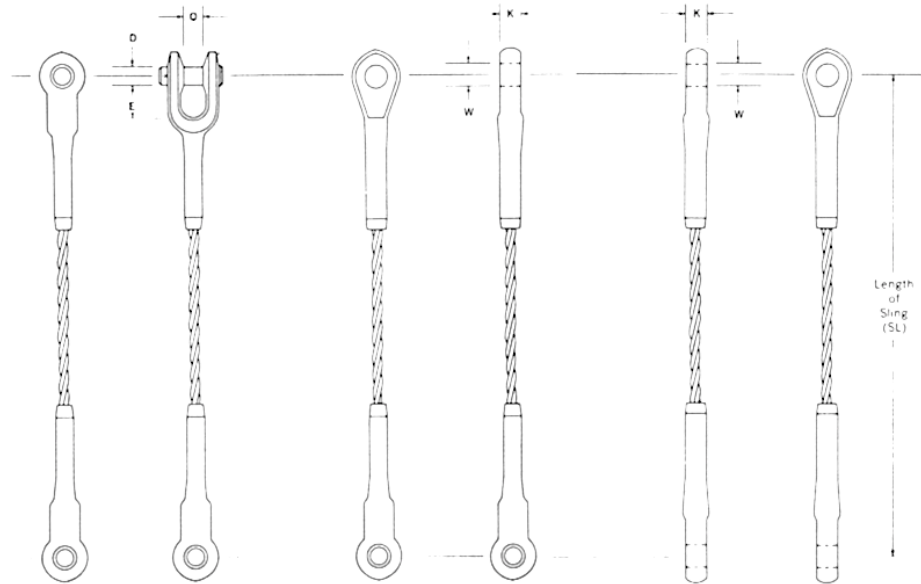

No. 500-P Pins Parallel No. 500-R Pins at Right Angles No. 503-P Pins Parallel No. 503-R Pins at Right Angles No. 502-P Pins Parallel No. 502-R Pins at Right Angles

Diam. of Rope (Inches)	Min. Length (SL) of Sling ft-in	Rated Capacity in Tons - EIPS IWRC Single Part Vertical	Open Swage Socket			Closed Swage Socket	
			O (Inches)	D (Inches)	E (Inches)	K (Inches)	W (Inches)
1/4	0' 11"	0.69	11/16	11/16	1-5/32	1/2	3/4
3/8	1' 3"	1.5	13/16	13/16	1-11/32	2/3	7/8
1/2	1' 8"	2.7	1	1	1-1/2	7/8	1-1/16
5/8	2' 0"	4.1	1-1/4	1-3/16	1-21/32	1-1/8	1-1/4
3/4	2' 5"	5.9	1-1/2	1-3/8	2-1/16	1-5/16	1-7/16
7/8	2' 10"	8.0	1-3/4	1-5/8	2-7/16	1-1/2	1-11/16
1	3' 2"	10.3	2	2	2-3/4	1-3/4	2-1/16
1-1/8	3' 7"	13.0	2-1/4	2-1/4	3-1/8	2	2-5/16
1-1/4	4' 0"	16.0	2-1/2	2-1/2	3-1/2	2-1/4	2-9/16
1-3/8	4' 5"	19.2	2-1/2	2-1/2	4	2-1/4	2-9/16
1-1/2	4' 9"	22.8	3	2-3/4	4-3/8	2-1/2	2-13/16
1-3/4	5' 5"	30.6	3-1/2	3-1/2	5	3	3-9/16
2	6' 4"	39.6	4	3-3/4	6-1/8	3-1/4	3-13/16

LETTER P DESIGNATES SOCKET PINS PARALLEL AND R AT RIGHT ANGLES (90*)

In accordance with ANSI B30.9-2.3, all slings terminated with swaged sockets shall be proof loaded.

WARNING: DO NOT EXCEED RATED CAPACITIES