


# THE JAMES WALKER CO.

## WALKER BOOM PENDANTS EPOXY POURED SOCKETS

\*ZINC POURED AVAILABLE UPON REQUEST

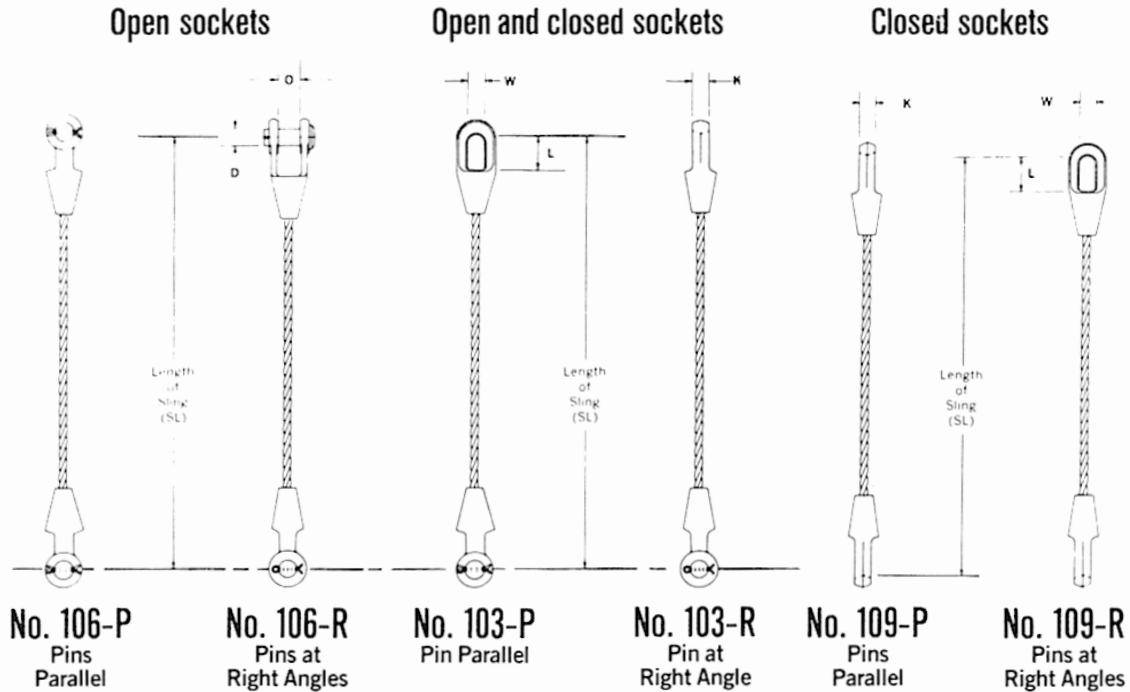

Diam. of Rope (Inches)	Min. Length (SL) of Sling ft-in	Rated Capacity in Tons - EIPS IWRC	Open Spelter Socket			Closed Spelter Socket	
			O (Inches)	D (Inches)	W (Inches)	L (Inches)	K (Inches)
3/4	1' 9"	5.9	1-1/2	1-3/8	1-5/8	3-1/16	1-1/4
7/8	2' 0"	8	1-3/4	1-5/8	1-23/25	3-9/16	1-1/2
1	2' 6"	10	2	2	2-3/10	4-1/16	1-3/4
1-1/8	2' 9"	13	2-1/4	2-1/4	2-14/25	4-9/16	2
1-1/4	3' 0"	16	2-1/2	2-1/2	2-4/5	5-1/11	2-11/50
1-3/8	3' 0"	19	2-1/2	2-1/2	2-4/5	5-1/11	2-11/23
1-1/2	3' 3"	23	3	2-3/4	3-1/5	6-1/10	2-11/23
1-5/8	3' 9"	26	3	3	3-1/4	6-3/4	2-3/4
1-3/4	4' 3"	31	3-1/2	3-1/2	3-3/4	7-13/16	3
2	4' 9"	40	4	3-3/4	4-3/8	8-13/16	3-1/4
2-1/4	5' 0"	49	4-1/2	4-1/4	5	10	3-5/8
2-1/2	5' 9"	60	5	4-3/4	5-1/2	10-5/8	4

**LETTER P DESIGNATES SOCKET PINS PARALLEL AND R AT RIGHT ANGLES (90\*)**

In accordance with ANSI B30.9-2.3, all slings terminated with spelter sockets shall be proof loaded.

**WARNING: DO NOT EXCEED RATED CAPACITIES**