


# THE JAMES WALKER CO.

## HAMMERLOK COUPLING LINK

### Hammerlok



- Attaches chain to master link and hooks
- Quench and tempered alloy steel
- 100% proof tested
- Fatigue rated
- Replacement kits available
- Split ring retainer pin available




| Size  | Working Load Limit | Product Code | Load Pin kit Product Code | Dimensions |      |      |      | Weight |
|-------|--------------------|--------------|---------------------------|------------|------|------|------|--------|
|       |                    |              |                           | A          | B    | C    | D    |        |
| in.   | lb.                |              |                           | in.        | in.  | in.  | in.  | lb.    |
| 7/32  | 2,100              | 664021-2     | R664021-2                 | 0.25       | 1.41 | 0.50 | 0.52 | 0.12   |
| 9/32  | 3,500              | 664028-2     | R664028-2                 | 0.31       | 1.94 | 0.75 | 0.70 | 0.26   |
| 3/8   | 7,100              | 664038-2     | R664038-2                 | 0.50       | 2.41 | 0.88 | 0.91 | 0.59   |
| 1/2   | 12,000             | 664050-2     | R664050-2                 | 0.69       | 3.38 | 1.25 | 1.41 | 1.42   |
| 5/8   | 18,100             | 664062-2     | R664062-2                 | 0.81       | 4.06 | 1.50 | 1.70 | 2.35   |
| 3/4   | 28,300             | 664075-2     | R664075-2                 | 0.94       | 4.78 | 1.81 | 2.02 | 3.67   |
| 7/8   | 34,200             | 664089-2     | R664089-2                 | 1.05       | 5.13 | 2.00 | 2.25 | 5.98   |
| 1     | 47,700             | 664100-2     | R664100-2                 | 1.25       | 5.75 | 2.25 | 2.08 | 9.47   |
| 1 1/4 | 72,300             | 664125-2     | R664125-2                 | 1.53       | 6.81 | 2.63 | 2.92 | 16.61  |

## Accoloy® Standard Magnet Slings

### Specifications

| Stock No. | Chain Size |    | WLL Lbs. at 60° | Master Link     |                    |                     | Oblong Link     |                    |                     | 5 Link Reach In. | Magnet Diameter In. |
|-----------|------------|----|-----------------|-----------------|--------------------|---------------------|-----------------|--------------------|---------------------|------------------|---------------------|
|           | In.        | mm |                 | A Dia. Mtl. In. | B Inside Width In. | C Inside Length In. | A Dia. Mtl. In. | B Inside Width In. | C Inside Length In. |                  |                     |
| 537301000 | 5/8        | 16 | 47,000          | 1-3/4           | 6                  | 10                  | 7/8             | 2-1/4              | 5-1/2               | 30-5/8           | up to 40            |
| 537301200 | 3/4        | 20 | 73,500          | 2               | 6                  | 10                  | 1               | 2-1/2              | 6                   | 34               | up to 45            |
| 537301400 | 7/8        | 22 | 88,900          | 2-1/4           | 6-1/2              | 11-1/2              | 1               | 2-1/2              | 6                   | 36-7/8           | up to 48            |
| 537301600 | 1          | 26 | 123,900         | 2-1/4           | 6-1/2              | 11-1/2              | 1-1/4           | 3                  | 7                   | 40               | up to 60            |
| 537302000 | 1-1/4      | 32 | 187,800         | 2-1/2           | 6-1/2              | 12-3/4              | 1-1/2           | 3                  | 7                   | 45-1/2           | 60 and over         |

Call for 7, 9, and 11 link reaches. Special order reaches available.

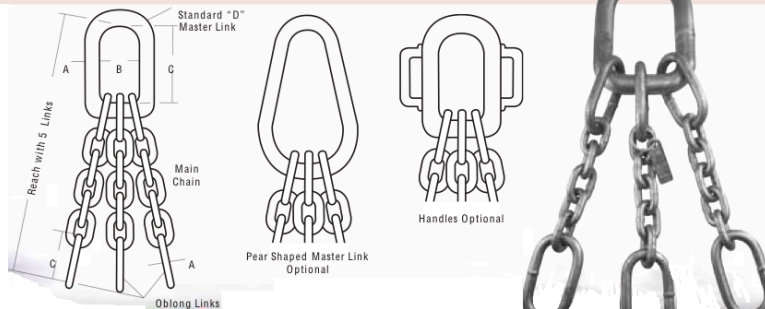

**WARNING: DO NOT EXCEED RATED CAPACITIES**