


# THE JAMES WALKER CO.

## GRABIQ CHAIN

### COMPONENTS

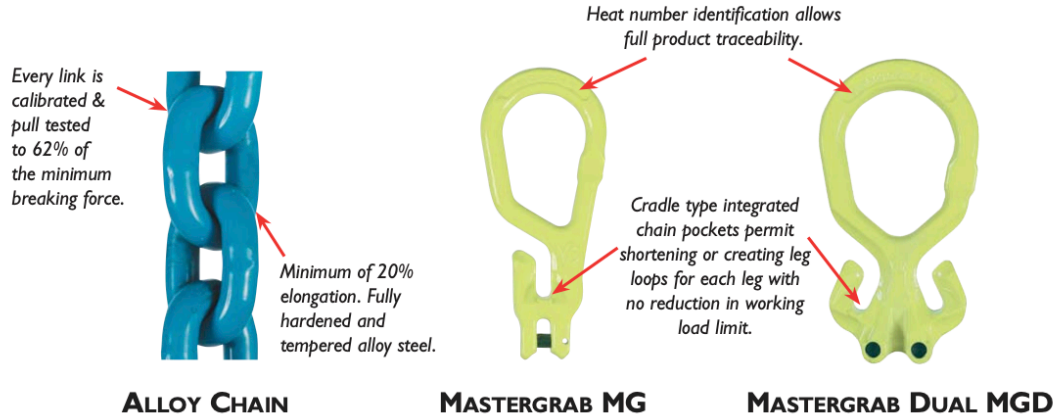

#### ALLOY CHAIN - GRADE 100

Model	Chain Size Inches	Working Load Limit *(Lbs)	OD	E	H	Weight 100 ft. (Lbs)
KLA-8-10	5/16"	5,700	0.32	0.95	0.45	97
KLA-10-10	3/8"	8,800	0.40	1.2	0.58	151
KLA-13-10	1/2"	15,000	0.52	1.5	0.72	253
KLA-16-10	5/8"	22,600	0.63	1.9	0.87	450

\*Design factor 4




#### MASTER GRAB TYPE MG

An all in one fitting, combining master link, connector and shortening function for single leg sling.

Model	Chain Size Inches	Working Load Limit *(Lbs)	L (In)	A	B	H	Weight Each (Lbs)
MG-8-10	5/16"	5,700	6.7	3.7	2.4	0.71	2.2
MG-10-10	3/8"	8,800	8.3	4.6	3.0	0.87	4.0
MG-13-10	1/2"	15,000	10.3	5.6	3.5	1.0	7.7
MG-16-10	5/8"	22,600	12.2	6.4	4.1	1.2	12.8

\*Design factor 4




#### MASTER GRAB DUAL TYPE MGD

An all in one fitting, combining master link, connector and shortening function for a two leg sling.

Model	Chain Size Inches	Working Load Limit *(Lbs) at 60°	L (In)	A	B	H	Weight Each (Lbs)
MGD-8-10	5/16"	9,900	6.7	3.9	3.0	0.83	3.1
MGD-10-10	3/8"	15,200	8.3	4.9	3.5	0.95	5.5
MGD-13-10	1/2"	26,000	10.3	5.8	4.1	1.1	11.0
MGD-16-10	5/8"	39,100	12.2	6.9	4.7	1.4	19.6

\*Design factor 4




**WARNING: DO NOT EXCEED RATED CAPACITIES**

# THE JAMES WALKER CO.


## GRABIQ CHAIN

### COMPONENTS

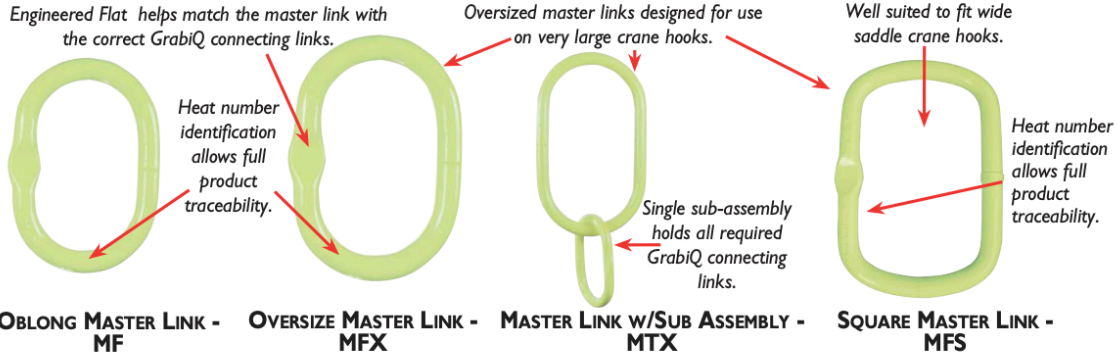

#### OBLONG MASTER LINK - MF

For 1, 2, 3, or 4 leg chain slings when used with C-Grab and C-Lok connectors



Model	Trade Size Inches	1-Leg 90°	Working Load Limit *(Lbs)	2-Legs 60°	Working Load Limit *(Lbs)	3-4 Legs 60°	Working Load Limit *(Lbs)	L	B	D	Weight Each (Lbs)
MF-86-10	1/2"	5/16"	5,700	-	-	-	-	4.7	2.8	0.55	0.9
MF-108-10	5/8"	3/8"	8,800	5/16"	9,900	-	-	5.5	3.2	0.67	1.5
MF-1310-10	7/8"	1/2"	15,000	3/8"	15,200	5/16"	14,800	6.3	3.7	0.87	3.3
MF-1613-10	1"	5/8"	22,600	1/2"	26,000	3/8"	22,900	7.5	4.3	0.99	4.8
MF-2016-10	1 3/8"	-	-	5/8"	39,100	1/2"	39,000	9.4	5.5	1.3	11.2
MF-2220-10	1 1/2"	-	-	-	-	5/8"	58,700	9.8	5.9	1.5	15.9

\*Design factor 4

#### OBLONG MASTER LINK - MFX OVERSIZED FOR LARGE CRANE HOOKS

For 1 or 2 leg chain slings when used with C-Grab and C-Lok connectors




Model	Trade Size Inches	1-Leg 90°	Working Load Limit *(Lbs)	2-Legs 60°	Working Load Limit *(Lbs)	L	B	D	Weight Each (Lbs)
MFX-108-10	1"	5/16"	5,700	-	-	13.4	7.1	0.99	8.2
MFX-108-10	1"	3/8"	8,800	5/16"	9,900	13.4	7.1	0.99	8.2
MFX-1310-10	1 1/8"	1/2"	15,000	3/8"	15,200	13.4	7.1	1.1	10.4
MFX-1613-10	1 3/8"	5/8"	22,600	1/2"	26,000	13.4	7.1	1.3	15.4
MFX-1916-10	1 1/2"	-	-	5/8"	39,100	13.4	7.1	1.5	19.6

\*Design factor 4

#### OBLONG MASTER LINK - MTX OVERSIZED FOR LARGE CRANE HOOKS

For 3 or 4 leg chain slings when used with C-Grab and C-Lok connectors




Model	Trade Size Inches	3-4 Legs 60°	Working Load Limit *(Lbs)	L	B	D	l	b	d	Weight Each (Lbs)
MTX-8-10	1 1/8"	5/16"	14,800	13.4	7.1	1.1	6.3	3.7	0.87	13.7
MTX-10-10	1 3/8"	3/8"	22,900	13.4	7.1	1.3	7.9	4.7	1.2	23.1
MTX-13-10	1 1/2"	1/2"	39,000	13.4	7.1	1.5	7.9	4.7	1.3	28.4
MTX-16-10**	1 3/4"	5/8"	58,700	13.4	7.1	1.8	-	-	-	30.2

\*Design factor 4

\*\*Does not require sub assembly

#### SQUARE MASTER LINK - MFS

For 1, 2, 3, or 4 leg chain slings when used with C-Grab and C-Lok connectors



Model	Trade Size Inches	1-Leg 90°	Working Load Limit *(Lbs)	2-Legs 60°	Working Load Limit *(Lbs)	3-4 Legs 60°	Working Load Limit *(Lbs)	L	B	D	Weight Each (Lbs)	Hook Size DIN 15401
MFS-1310-10	7/8"	5/16"	5,700	5/16"	9,900	5/16"	14,800	7.9	4.9	0.87	4.2	12
MFS-1310-10	7/8"	3/8"	8,800	3/8"	15,200	-	-	7.9	4.9	0.87	4.2	12
MFS-1310-10	7/8"	1/2"	15,000	-	-	-	-	7.9	4.9	0.87	4.2	12
MFS-1613-10	1"	5/8"	22,600	1/2"	26,000	3/8"	22,900	8.7	5.3	1.0	6.0	12
MFS-2016-10	1 1/4"	-	-	5/8"	39,100	1/2"	39,000	9.4	5.3	1.3	9.9	16
MFS-2220-10	1 1/2"	-	-	-	-	5/8"	58,700	9.8	6.9	1.5	16.8	50
MFSW-2220-10	1 1/2"	-	-	-	-	5/8"	58,700	12.6	8.9	1.5	20.9	25

\*Design factor 4

**WARNING: DO NOT EXCEED RATED CAPACITIES**