


# THE JAMES WALKER CO.

## GRABIQ CHAIN


### COMPONENTS



**OKE**  
FOUNDRY HOOK



**GG**  
GRAB HOOK

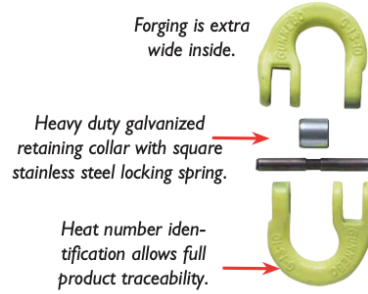


**G**  
ALLOY COUPLING LINKS

#### OKE Foundry Hook (EYE TYPE)

Model	Chain Size Inches	Working Load Limit *(Lbs)	L	B	E	F	G	H	Weight Each (Lbs)
OKE-7/8-10	5/16"	5,700	4.8	2.5	1.1	0.45	0.79	1.0	1.5
OKE-10-10	3/8"	8,800	5.9	3.0	1.3	0.6	1.0	1.1	2.9
OKE-13-10	1/2"	15,000	7.2	3.5	1.7	0.7	1.3	1.5	6.2
OKE-16-10	5/8"	22,600	8.5	4.0	2.2	0.9	1.6	1.8	10.8


\*Design factor 4:1



#### GG Grab Hook (CLEVIS CRADLE TYPE)

Model	Chain Size Inches	Working Load Limit *(Lbs)	L	B	Weight Each (Lbs)
GG-8-10	5/16"	5,700	2.2	0.41	0.88
GG-10-10	3/8"	8,800	3.3	0.47	1.8
GG-13-10	1/2"	15,000	3.8	0.63	3.7
GG-16-10	5/8"	22,600	4.9	0.79	6.8


\*Design factor 4:1



#### G Alloy Coupling Links

Model	Chain Size Inches	Working Load Limit *(Lbs)	L	B	G	E	Weight Each (Lbs)
G-8-10	5/16"	5,700	2.2	0.71	0.35	0.87	0.44
G-10-10	3/8"	8,800	2.7	0.98	0.47	1.0	0.66
G-13-10	1/2"	15,000	3.5	1.1	0.59	1.3	1.5
G-16-10	5/8"	22,600	4.1	1.4	0.75	1.6	2.6

\*Design factor 4:1



**WARNING: DO NOT EXCEED RATED CAPACITIES**