

# THE JAMES WALKER CO.

## PEERLESS CHAIN



### Accoloy® Plate Hook

Accoloy Plate Hooks are designed for the most popular chain sizes - 9/32", 3/8", 1/2", 5/8" and 7/8". They are proof tested to the same values as the corresponding chain - therefore, the same working load limit applies.

Fabricated from alloy steel, Plate Hooks can be furnished on Registered Slings as well as with various chain assemblies. Accoloy Plate Hooks are intended for use in handling plates, flats and structurals.

#### Specifications

Stock Number	Size of Chain		WLL Lbs.	Wt. Each Lbs.	Dimensions-Inches						
	In.	mm			L	M	N	O	P	T	U
593400400	9/32	7	3,500	2.4	2	2	1-1/2	13/16	7/8	3/4	2
593400600	3/8	10	7,100	4.6	2-5/8	3	1-7/8	1-1/16	1-1/8	3/4	2-1/4
593400800	1/2	13	12,000	10.6	3-1/2	4	2-1/2	1-3/8	1-1/2	1	3
593401000	5/8	16	18,100	20.7	4-3/8	5	3-1/8	1-3/4	1-7/8	1-1/4	3-3/4
593401200	3/4	20	28,300	36.7	5-3/16	6	3-3/4	2-1/8	2-1/2	1-1/2	4-1/2
593401400	7/8	22	34,200	52.6	6	7	4-1/2	2-7/16	2-5/8	1-3/4	5-1/4

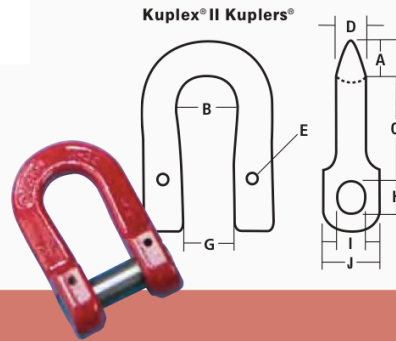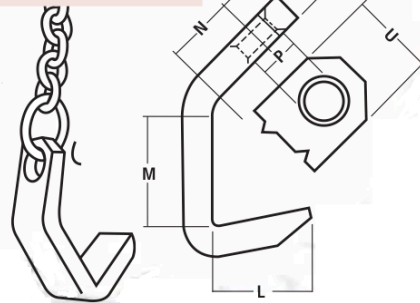

### Kuplex® II Kuplers®

Kuplers act as a connection device between Master Links and Chain on all multiple leg Kuplex II Chain Slings. On single leg assemblies they can be used in lieu of the popular Kuplex II Kuplink. Resembling a shackle in appearance the Kuplers provide a high strength, high integrity connection when used to connect a special attachment to the alloy chain assembly.

#### Specifications

Stock Number	Kupler No.	Size of Chain		WLL Lbs.	A	B	C	D	E	G	H	I	J	Weight Each Lbs.
		In.	mm		In.	In.	In.	In.	In.	In.	In.	In.		
598150020	K-20	9/32	7	4,300†††	7/16	13/16	1-5/16	5/16	1/8	23/32	13/32	11/32	5/8	0.3
598150021	K-21	3/8	10	8,800†††	19/32	1-1/16	1-13/16	7/16	5/32	7/8	9/16	15/32	7/8	0.7
598150022	K-22	1/2	13	15,000†††	3/4	1-5/16	2-9/16	9/16	3/16	1-3/32	3/4	21/32	1-1/8	1.5
598150023	K-23	5/8	16	22,600†††	15/16	1-5/8	3	11/16	1/4	1-11/32	15/16	13/16	1-1/2	3.0
598100024	K-24	3/4	20	28,300††	1	1-15/16	3-13/32	13/16	5/16	1-19/32	1-7/32	1	1-3/4	4.8
598100025	K-25	7/8	22	34,200††	1-1/8	2-1/4	3-7/8	15/16	3/8	1-27/32	1-9/32	1-1/16	2	6.1
599100026	K-26	1	26	35,900†	1-1/4	2-11/16	4-1/4	1-1/16	NA	2	1-7/32	1-3/32	2-3/8	8.4
599100028	K-28	1-1/4	32	56,100†	1-1/2	3-1/2	5-1/8	1-5/16	NA	2-9/32	1-1/2	1-11/32	2-7/8	14.8

† Values shown for these sizes are for Grade 63. †† Values shown for these sizes are for Grade 80. ††† Values shown for these sizes are for Grade 100.

**WARNING: DO NOT EXCEED RATED CAPACITIES**