

THE JAMES WALKER CO.


PEERLESS CHAIN

Accoloy® Eye Type Sling Hooks

Specifications

Stock Number	Size of Chain		WLL Lbs.	Wt. Each Lbs.	D In.	E In.	F In.	G In.	H In.	I In.	K In.
	In.	mm									
592353080	9/32	7	4,300†††	1.0	3-13/16	1-7/32	5/8	11/16	5-7/32	3-5/8	1-1/16
592353081	3/8	10	8,800†††	2.5	5-3/8	1-5/8	13/16	15/16	7-1/4	4-13/16	1-3/8
592353082	1/2	13	15,000†††	5.3	6-9/16	2	1-1/32	1-3/16	8-15/16	6-1/16	1-13/16
592353083	5/8	16	22,600†††	7.9	7-3/4	2-7/16	1-1/4	1-5/16	10-3/8	7-5/32	2-1/8
592303084	3/4	20	28,300††	11.2	8-7/8	2-11/16	1-1/2	1-1/2	11-15/16	7-7/8	2-5/16
592303085	7/8	22	34,200††	19.6	10-1/8	3	1-3/4	1-3/4	13-3/4	9-5/32	2-3/4
*592303086	1	26	35,900†	21.8	11-1/16	3-3/8	2	1-7/8	15	10-1/16	3
*592303088	1-1/4	32	56,100†	44.4	13-1/8	4-1/16	2-1/4	2-5/16	18	12-5/16	3-3/4

† Values shown for these sizes are Grade 63. †† Values shown for these sizes are Grade 80. ††† Values shown for these sizes are Grade 100.
* Latch eye hole drilled only by request.


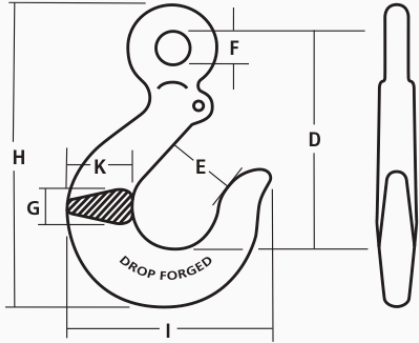


Accoloy® Eye Type Sling Hooks



Latch Kit page 40

Kuplex II® Clevis Type Sling Hooks

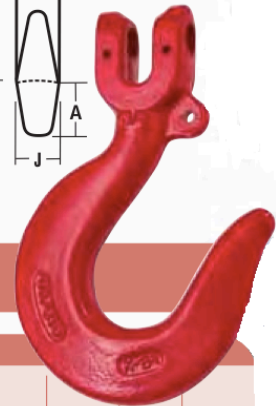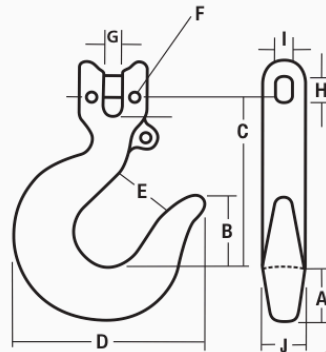

Kuplex® II Clevis Type Sling Hooks

Specifications

Stock Number	Hook No.	Size of Chain		WLL Lbs.	A In.	B In.	C In.	D In.	E In.	F In.	G In.	H In.	I In.	J In.	Wt. Lbs.
		In.	mm												
598850080	K-80	9/32	7	4,300†††	1	1-1/2	3-5/16	3-5/8	1-1/8	1/8	5/16	13/32	11/32	5/8	1.3
598850081	K-81	3/8	10	8,800†††	1-9/32	2-1/32	4-25/32	4-13/16	1-5/8	5/32	7/16	9/16	15/32	7/8	3.1
598850082	K-82	1/2	13	15,000†††	1-11/16	2-7/16	6-1/8	6-1/8	2	3/16	9/16	3/4	21/32	1-1/8	6.5
598850083	K-83	5/8	16	22,600†††	1-15/16	2-7/8	6-13/16	7-7/32	2-7/16	1/4	11/16	15/16	13/16	1-1/2	10.7
598800084	K-84	3/4	20	28,300††	2-3/8	3-1/4	8-17/32	8-3/16	2-11/16	5/16	13/16	1-7/32	1	1-3/4	16.6
598800085	K-85	7/8	22	34,200††	2-3/4	3-21/32	9-5/8	9-15/32	3	3/8	15/16	1-9/32	1-1/16	2	25.9
599800086	K-86	1	26	35,900†	2-11/16	4-1/16	10-1/16	10-1/16	3-3/8	NA	1-3/8	1-7/32	1-3/32	1-7/8	26.9

† Values shown for these sizes are Grade 63. †† Values shown for these sizes are Grade 80. ††† Values shown for these sizes are Grade 100.
WARNING: Working Load Limits must not be exceeded. Do not point load hooks.

WARNING: DO NOT EXCEED RATED CAPACITIES